Vellano™

Get Inspired

Luctio Twin Shower On Rail Installation Guide

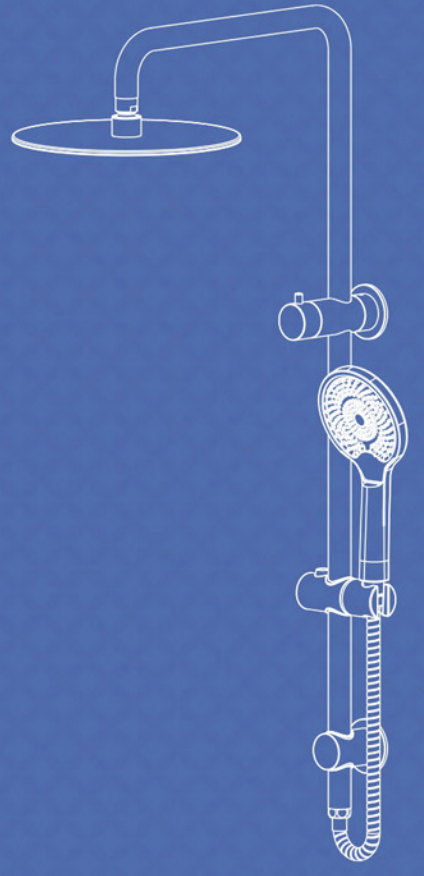

Vellano™

1800 411 828
14B/ 243 Bradman St
Acacia Ridge, QLD

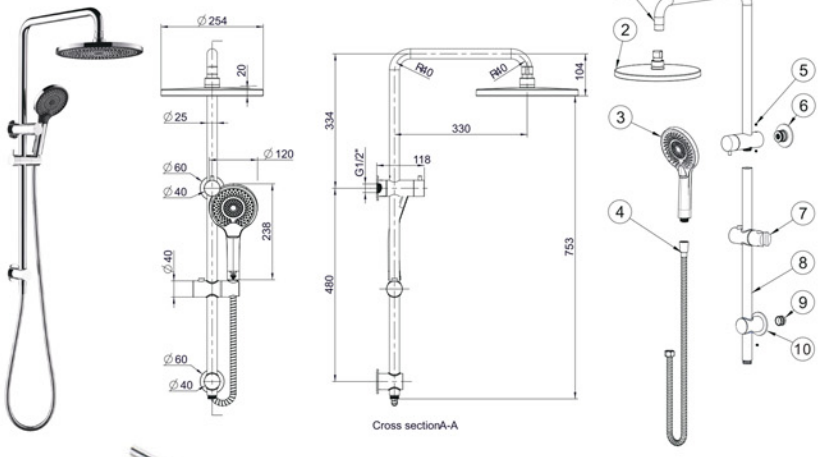

NO.	Ddescription	QTY
1.	Main body	X1
2.	Top spray shower	X1
3.	Hand shower head	X1
4.	Shower hose	X1
5.	screw	X3
6.	Inlet base	X1
7.	Shower chair	X1
8.	Straight pipe	X1
9.	Fixed block	X1
10.	Sliding sleeve	X1

Important Installation Requirements

1. Prior to installing the tap, all pipes must be flushed from debris
2. Products are manufactured to AS/NZS 3718:2021 and with Watermark and WELS certification as shown in the packaging
3. All surfaces must be cleaned with clean water or mild liquid detergents. Do Not Use cream cleaners or citris based cleaners
4. Installation to comply with AS/NZ 3500.1. The maximum operating pressure to be 500KPA. Pressure above 500KPA can cause damage from water hammer. Pressure over 500KPA will require a limiting valve
5. Minimum water pressure is 150KPA, Maxiumum Temperature 70 degrees.

Warranty Terms:

Shower Components - 10 years, Shower Hose 1 Year

Labour - 1 Year

recommended working pressure
500 KPA

maximum hot water temperature
70 degrees

1800 411 828
14B/ 243 Bradman St
Acacia Ridge, QLD

Step 1  Take out parts 6# and 9# and install them on the wall	Step 2  Take out parts 7# and 8# and load them into 1#	Step 3 Take out part 10# and load it into 8#
Step 4  Mount the shower to the wall and secure it	Step 5 Load 2#3#4# parts	Step 6 Water and ensure that there is no leakage before use

The warranty will be void for any of the following reasons

- The product has been damaged through misuse, neglect or accident.
- The product has not been used in accordance with any applicable instruction guide.
- The purchaser has attempted to modify of repair the product.
- The product is not installed by a Registered Plumber.

www.vellano.au ABN 39 651 085 684